


## DPJ14 – 14mm Fastflo™ in low-profile diffuser panels installed between first floor joists or battens

### Supplied by Nu-Heat

14mm Fastflo™ tubing  
Nu-Heat TriPanel –  
25mm EHD polystyrene  
Heat transfer plates

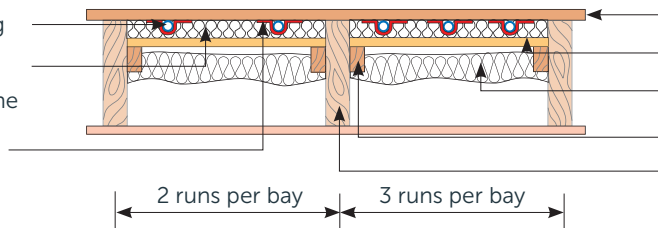

### Supplied by others

Floor deck (see below)  
9mm plywood support decking  
Floor insulation (see note below)  
50 x 25mm timber battens  
Joists at 400mm centres

### FLOOR HEATING TUBE

Nu-Heat's 14mm Fastflo™ tubing is extremely flexible which means that it can easily be installed around the numerous turns typical to any design. The use of multiple, shorter Fastflo™ coils within each temperature control zone means the tubing is installed at closer centres to ensure a more even heat distribution.

### NU-HEAT TRIPANEL

Nu-Heat TriPanel™ is a high quality pre-moulded and versatile product designed to allow three tube spacings – 115mm, 175mm and 230mm. Dimensions: 1400mm x 700mm x 25mm.

### INSULATION

Part E of the Building Regulations requires a minimum of 100mm mineral wool insulation to be placed in the joist void in separating floors for acoustic reasons. For floors over unheated areas, at least 150mm of mineral wool should be fitted below the panels or to building regulations Part L, whichever is greater.

### FLOOR DECK

Engineered board floors thicker than 20mm may be laid on up to 3mm thick non-felt underlay directly onto the underfloor heating. Areas to be tiled can be covered by a plywood deck instead of chipboard. A quality two-part flexible adhesive may then be used for fixing the tiles.

For other areas 18 – 22mm chipboard deck may be used. The overall thickness of the deck should not exceed 30mm unless this has been agreed with a Nu-Heat Design Engineer.

### FLOOR COVERINGS

Tiles, stone and thin laminates offer benefits such as improved response time and higher heat output. Carpets can be used but the Tog value when combined with performance underlay should be no greater than 2.5. If the system is powered by a heat pump greater restrictions apply. Natural timber with a low moisture content can be used, but care must be taken to properly acclimatise the wood by following manufacturers' instructions.

### WARRANTIES/INSURANCE

**Manufacturer's warranty:** all UFH tube supplied by Nu-Heat is covered by a 50-year warranty, the first 10 years of which are insurance-backed.

**Product liability:** Nu-Heat maintains product liability insurance to £5 million.

**Professional indemnity:** As Nu-Heat's design service is integral to the operational effectiveness of the UFH system, the company holds professional indemnity insurance of £5 million to cover all aspects of our consultation and design services.

